


BW4 neo CT/CT-S (CE)

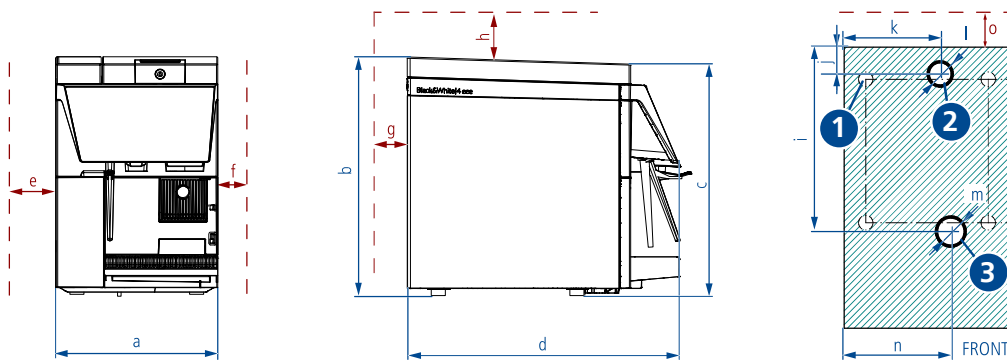


- 1 Machine feet
- 2 Fixed water connection and drain
- 3 Grounds ejection (optional)

a	345 mm	b	505 mm 550* mm	c	490 mm 535* mm	d	580 mm
e	150 mm	f	100 mm	g	80 mm	h	350 mm
i	379 mm	j	55 mm	k	200 mm	l	50 mm
m	60 mm	n	222 mm	o	80 mm		

* Height fixed water / wastewater operation

Drain

- **p**: Distance of machine to drain < 1 m
- Drain line (hose) not sagging.
- No back pressure in the water line.
- The end of the line not submerged in water.



Machine parameters		Water connection specifications	
Connection / power CE	220-240 VAC 50-60 Hz 2000-2350 W	Water supply	3/8"
		Dynamic water pressure	2-4 bar
		Steam boiler pressure	2.6 bar
Weight	25 kg	Chlorine	None
		TDS	70-200 ppm
		Total hardness	5-8 °dH
		pH	6.8-7.4
		Alkalinity	<100 ppm
		Iron	<0.25 ppm